




SR8301995 [Sears Mid Back Seat, Brown Fabric w/Air Suspension]

Instruction Guide

Instruction Guide SR8301995

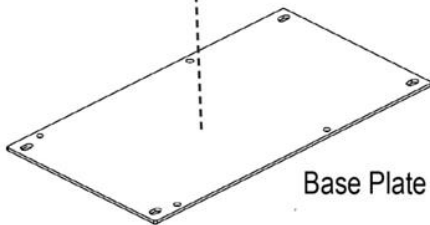

Installation Instructions to Replace an Original Hydra-Cushion Seat and Suspension in a JD 30-55 Series Row Crop Tractor

1. Remove the original seat and suspension.
2. Cap the hydraulic lines with nuts & plugs. Cut and plug the breather line by turning a 5/16" x 1" bolt into the tube.
3. Bolt the suspension to the pedestal with four 8mm x 20mm bolts. Use four 7/16" nuts as spacers on the pedestal. (See illustration below.)
4. Fasten the base plate to the cab deck using the original bolts.
5. Locate a power source and connect the suspension to power and ground.

