



# SR192707 [Side Kick Seat, Brown Fabric]

Instruction Guide

## Installation Instructions

### SR192707

#### Side Kick Seat

#### For Machines with Passenger Seat Fender or Cup Holder Fender

**Tractors:** 7630, 7720, 7820, 7830, 7920, 7930, 8100T, 8100, 8110, 8110T, 8120T, 8120, 8130, 8200, 8200T, 8210, 8210T, 8220T, 8220, 8230, 8300T, 8300, 8310, 8310T, 8320, 8320T, 8330, 8400, 8400T, 8410T, 8410, 8420, 8420T, 8430, 8520T, 8520, 8530, 9300T, 9320T, 9400T, 9420T, 9430T, 9520T, 9530T, 9620T, 9630T

**Sprayers:** 4720, 4730, 4830, 4930, 4940



### Removing Left-Hand Upholstery

*NOTE: Retain all hardware for reuse*

1. Slide seat to most rearward position
2. Pull floor mat back from left-hand upholstery and remove screws (A)
3. Remove lock pin and disconnect door cylinder (B)



*NOTE: Hold cab door open using rubber straps*

4. Remove door cylinder ball stud and plastic cover
5. For machines equipped with rear window tray, remove tray screws (C), latch screws (D) and latch (E)
6. For machines equipped with fuse panel cover, open rear window, then remove fuse panel cover (F), screw (G) and cover (H)

*IMPORTANT: When removing tray or cover, avoid damaging upholstery by carefully spreading molding around cab post*

7. Remove rear tray
8. Remove left-hand upholstery panel

C – Tray Screws


D – Latch Screws

E – Latch

F – Fuse Panel Cover

G – Screw

H – Cover

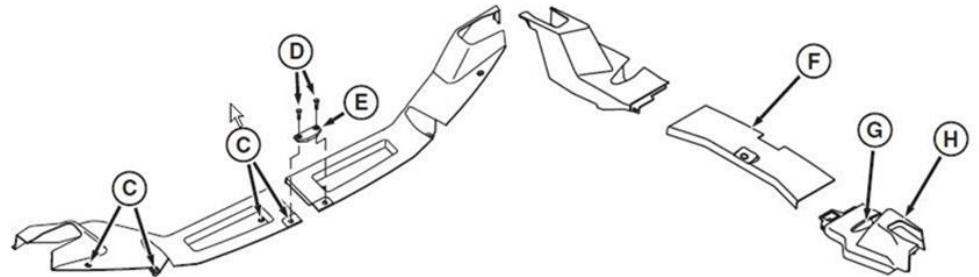


### Locating Installation Holes:

*NOTE: Before proceeding, place upholstery panel on a clean surface*

1. Align seat bracket template on upholstery and trace
2. Using a jigsaw, cut along the traced line
3. From lower molding, measure back 363.5mm (14-5/16") (A). Measure up 323mm (12-3/4") from cab floor (B)
4. Using a 30mm (1-1/8") hole saw, cut lower seat belt latch hole in upholstery
5. From the front edge of template area, measure back 160mm (6-5/16") (C). Measure over 287mm
6. Using a 30mm (1-1/8") hole saw, cut upper seat belt latch hole
7. If tractor is equipped with threaded bosses at these locations, seat belt will be attached (step 14) using 12mm x 25mm bolts
  - a. If tractor is not equipped with threaded bosses at these locations, drill holes from outside of fender and seat belt will be attached (step 14) using 12mm x 55mm bolts


# SR192707 [Side Kick Seat, Brown Fabric]

## Instruction Guide

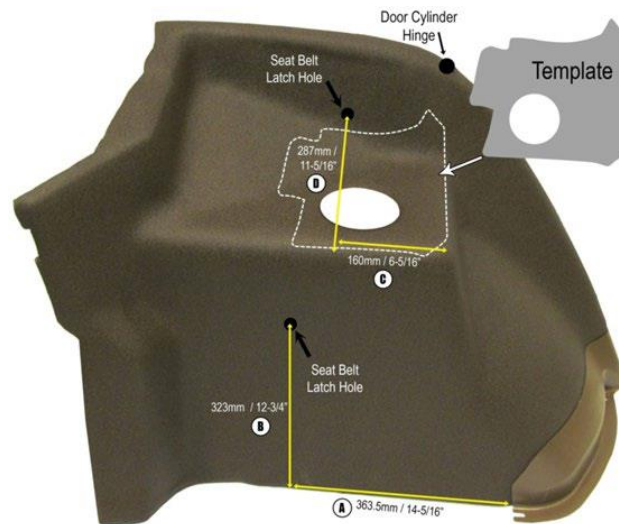

### Installing Side Kick Seat

8. Remove forward cushion bolts (A) and loosen rear cushion bolt (B)
9. Remove cushion by sliding forward on seat base

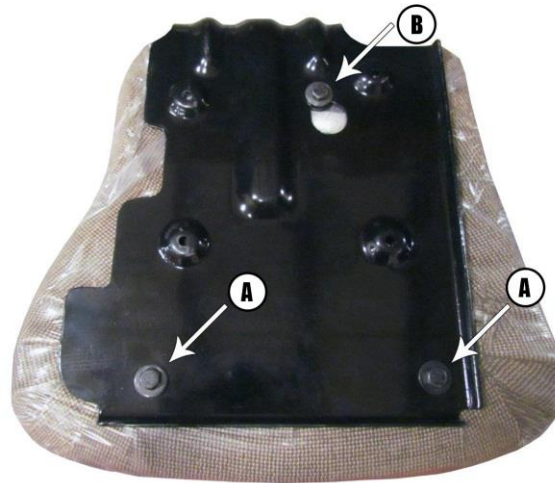


10. Reinstall left-hand upholstery
11. Reinstall rear cab tray, window latch and tighten hardware
12. Attach seat bracket to fender bracket using four self-tapping screws (A)
13. Using 12mm x 25mm bolts, install seat belt strap to both sides. Push upholstery against fender to align belt. Panel will pull toward fender when tightened

## SR192707 [Side Kick Seat, Brown Fabric]

### Instruction Guide

14. Reinstall door cylinder ball stud and plastic cover (B)

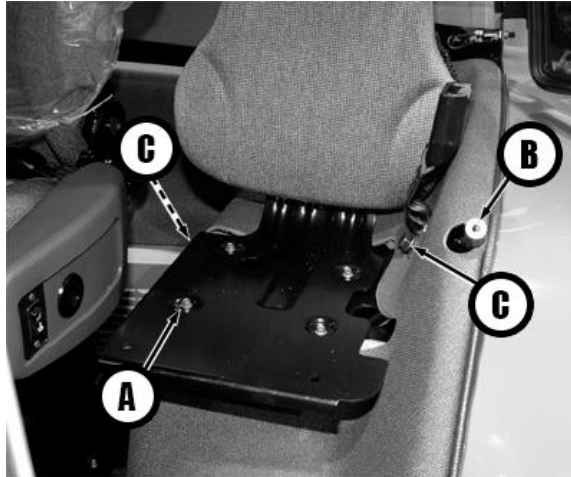

15. Reinstall cushion by placing it on base and pushing rearward until rear bolt (B) slides into slot (C)
16. Reinstall forward seat bolts (A) and tighten
17. Reinstall door cylinder and retaining clip
18. Reinstall floor mat
19. Install left-hand door handle pad

